

[®]
trovan

LID 575ISO



- Versatile multi-system reader
- Store up to 5,370 readings
- Time and date stamp readings
- USB interface with optional bluetooth.


trovan[®] LID 575ISO

Mid-Range Reader,
USB
FDX-B

The LID-575ISO Mid-Range Reader is a versatile portable reader for animal shelters, breeders and vet practices, as well as livestock operators. The reader will store up to 5370 readings in memory and will download them to a PC via USB or, if the bluetooth option is selected, via bluetooth. The LID-575ISO Mid-Range Reader will read TROVAN UNIQUE™ transponders, Destron/HomeAgain transponders and their clones, as well as FDX-B and HDX transponders.

OPTIONAL ADDITIONAL EQUIPMENT

HA-575 Extension handle
KID-575 Carrying case

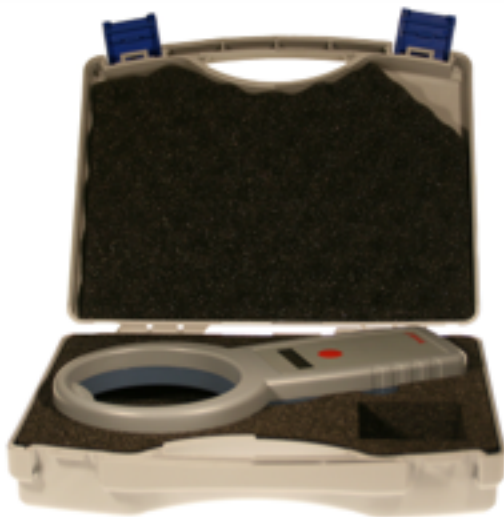

DIMENSIONS

Width 120 mm (4.72 in.)
Length 238 mm (9.37 in.)
Height 35 mm (1.38 in.)

WEIGHT

300 gr. (10.6 oz) including batteries

SUPPLY VOLAGE

4x 1.5V AA battery alkaline/NiMH rechargeable

SUPPLY CURRENT

Approx. 500mA

BATTERY LIFE

Approx. 3 hour (continuous read)

DISPLAY

LCD (2 lines x 16 characters)

MEMORY

256 kbit EEPROM is standard
(expansion with 1024 kbit EEPROM is possible).
w/o date and time: 2010 codes min.,
5370 codes max.

CLOCK/CALENDAR

Yes

INTERFACE

mini n-USB port

TYPICAL READING TIME

24 ms

MATERIAL

ABS UL 94 H

OPERATING TEMPERATURE

0°C to +70°C (32°F to +158°F)

READING DISTANCE

ID-100 up to 80 mm (3.2 in.)
ID-200 up to 100 mm (3.9 in.)
ID-300 up to 80 mm (3.2 in.)
ID-400 up to 175 mm (6.9 in.)
Destron clones up to 70 mm (2.7 in.)
FDX-B up to 80 mm (3.2 in.)

OPTION

Bluetooth interface